



CRYSTAL

TIRE

for confident drive...

PCR | LTR | TBR | OTR





CRYSTAL
TIRE

COMPANY PROFILE

Fales Grand one of the leading international trading companies based in Dubai – U.A.E. with its wholly owned foreign subsidiaries in China, Iraq and Saudi Arabia. Being involved in the Tire, Tube and Automotive Battery business for last 25 years, Fales Grand Company earned wealth of experience to offer.

Ever since the company was established, we always have been going forward with positive and challenging mind to bring in all best products of China, South Korea to region such as Asia, Middle East, Africa, and European countries.


Our mission is 'Transforming Vision into Reality' and to achieve this, we aim to provide quality products, strive to keep ourselves up-to-date in technologies and resolutions that meet all generation requirements. At the pinnacle our priority is to foster our customer's profitability by serving private OEM brands, exclusive selling-rights at very competitive prices, full range of point-of-sale materials. Developing a Corporate Culture that enhances the value of our business, expand opportunities for the growth of an objective to provide easy access to our products and services round the clock. For more information please visit our website www.falesgrand.com



*Transforming
Vision into
Reality.*



**CRYSTAL
TIRE**

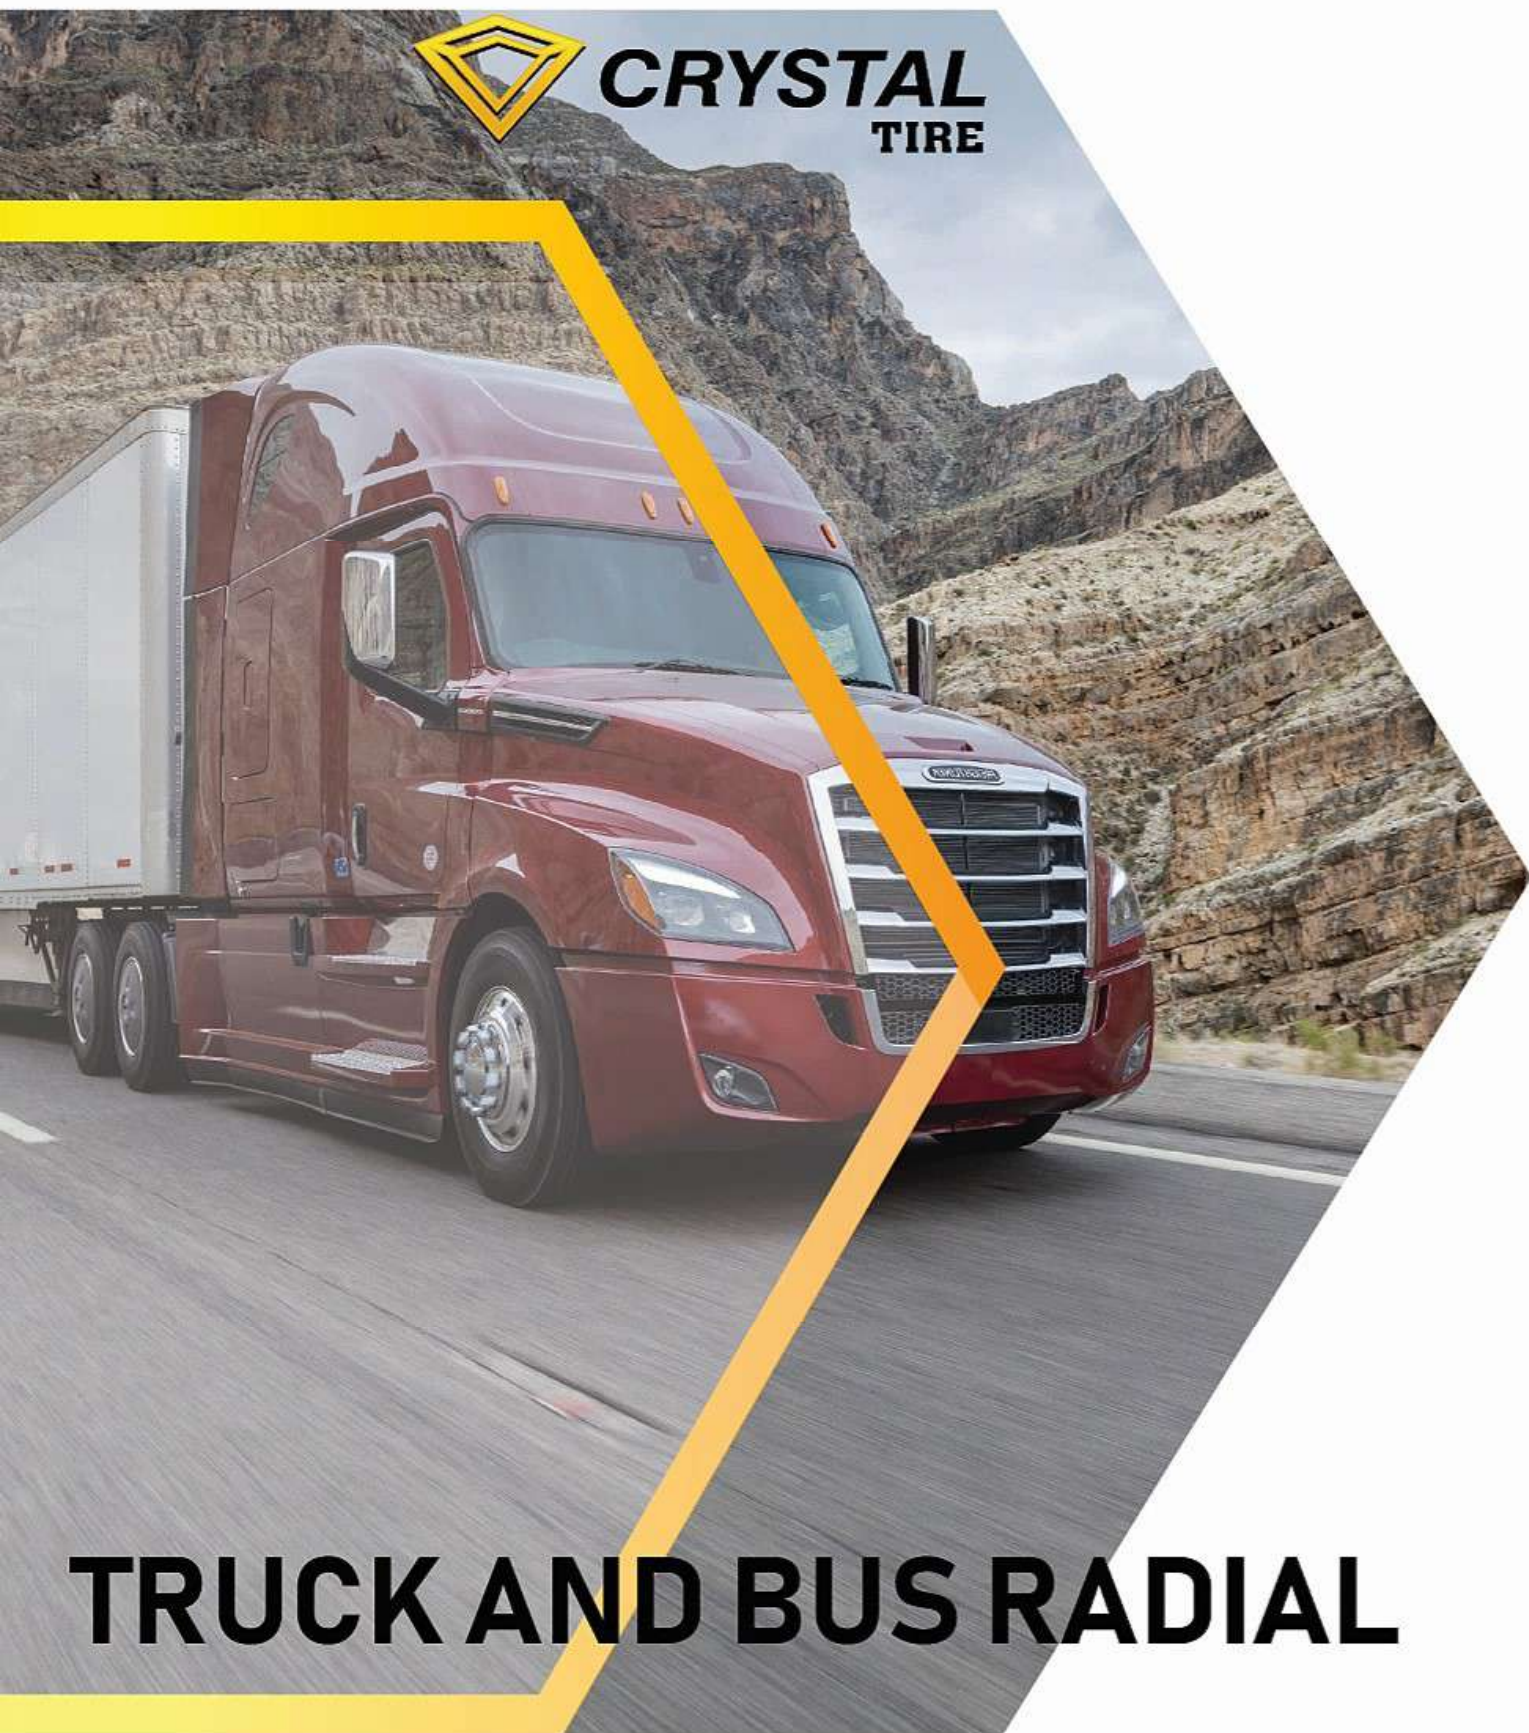

TRUCK AND BUS RADIAL

TRUCK BUS RADIAL



CRYSTAL
TIRE



CS 504

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max Load(kg) Single/Dual	Inflation Pressure (kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)
900R20	16	CS504	144/142	K	20.00	2800/2650	900	259	1019
1000R20	18	CS504	149/146	K	20.00	3250/3000	930	278	1054
1100R20	18	CS504	152/149	K	20.00	3550/3250	930	293	1085
1200R20	18	CS504	154/149	K	20.00	3790/3270	840	315	1125
11R22.5	16	CS504	148/145	M	22.50	3150/2900	850	279	1054
315/80R22.5	20	CS504	156/152	L	22.50	4000/3550	860	312	1076
315/80R22.5	20	CS504	154/151	M	22.50	4000/3550	860	312	1076



CS-520

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
12R22.5	18	CS520	152/149	M	22.50	3550/3250	930	300	1085	16.0
315/80R22.5	20	CS520	156/152	L	22.50	4000/3550	860	312	1076	23.0
315/80R22.5	20	CS520	154/151	M	22.50	4000/3550	860	312	1076	23.0



CS-555

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
1100R20	18	CS555	152/149	K	20.00	3550/3250	930	293	1085	18.0

TRUCK BUS RADIAL



CRYSTAL
TIRE



CS-580

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
1200R24	20	CS580	160/157	K	24.00	4500/1425	900	315	1125	15.5
315/80R22.5	20	CS580	156/152	L	22.50	4000/3550	860	312	1076	16.5
315/80R22.5	20	CS580	154/151	M	22.50	4000/3550	860	312	1076	16.5



CS-716

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
750R16	14	CS716	122/118	M	16.00	1500/1320	770	215	805	13.0
825R16	16	CS716	128/124	M	16.00	1800/1600	770	235	855	15.0
900R20	16	CS716	144/142	K	20.00	2800/2650	900	259	1019	15.5
1000R20	18	CS716	149/146	K	20.00	3250/3000	930	278	1054	16.5
1100R20	18	CS716	152/149	K	20.00	3550/3250	930	293	1085	17.0
1200R20	18	CS716	154/149	K	20.00	3790/3270	840	315	1125	17.5
1200R24	20	CS716	160/157	K	24.00	4500/1425	900	315	1125	16.0
11R22.5	16	CS716	148/145	M	22.50	3150/2900	850	279	1054	15.0
13R22.5	20	CS716	156/152	L	22.50	4000/3550	860	320	1124	16.5
315/80R22.5	20	CS716	156/152	L	22.50	4000/3550	860	312	1076	16.5



CS-717

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter	Pattern Depth (mm)
1100R20	18	CS717	152/149	K	20.00	3550/3250	930	293	1085	17.5
1200R20	18	CS717	154/149	K	20.00	3790/3270	840	315	1125	18.5

TRUCK BUS RADIAL



CRYSTAL
TIRE



CS-719

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
295/80R22.5	18	CS719	152/149	M	22.50	3550/3250	900	298	1044	15.0



CS-760

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
12R22.5	18	CS760	152/149	M	22.50	3500/3250	930	300	1085	16.5
13R22.5		CS760	156/152	L	22.50	4000/3550	860	320	1124	17.0
315/80R22.5	20	CS760	156/152	L	22.50	4000/3550	860	312	1076	14.5



CS-770

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
1200R24	20	CS770	160/157	K	24.00	4500/1425	900	315	1125	19.0

TRUCK BUS RADIAL



CRYSTAL
TIRE



CS-820

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
315/80R22.5	20	CS820	156/152	L	22.50	4000/3550	860	312	1076	20.0



CS-850

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
315/80R22.5	20	CS850	156/152	L	22.50	4000/3550	860	312	1076	16.50



CS-888

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
315/80R22.5	20	CS850	156/152	L	22.50	4000/3550	860	312	1076	16.5



CS-900

CRYSTAL TBR

SIZES	PR	PATTERN	load index	Speed level	Standard Rim	Max Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width (mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
1200R24	20	CS888	160/157	K	24.00	4500/1425	900	315	1125	20.0



**CRYSTAL
TIRE**



PASSENGER CAR RADIAL


CRYSTAL
TIRE

Energize
CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
165/60R14	4	Energize	75	H	5J	387	300	170	554	7.2
165/65R14	4	Energize	79	T	5J	437	300	170	570	7.2
185/70R14	4	Energize	88	H	5 1/2J	560	300	189	616	8.0
195/55R15	4	Energize	85	V	6J	515	300	201	595	8.0
195/60R15	4	Energize	88	H	6J	560	300	201	615	8.0
195/65R15	4	Energize	91	V	6J	615	300	201	635	8.0
205/65R15	4	Energize	94	V	6J	670	300	209	647	8.5
225/60R15	4	Energize	96	V	6 1/2J	710	300	228	651	8.0
195/50R16	4	Energize	84	V	6J	500	300	201	602	8.0
205/55R16	4	Energize	91	V	6 1/2J	615	300	214	632	8.0
205/65R16	4	Energize	95	H	6J	690	300	209	672	8.0
205/60R16	4	Energize	92	V	6J	630	300	209	652	8.0
215/65R16	4	Energize	98	H	6 1/2J	750	300	221	686	8.0
235/60R16	4	Energize	100	H	7J	800	300	240	688	8.0
215/55R17	4	Energize	94	V	7J	670	300	226	668	8.0
225/55R17	4	Energize	101 XL	H	7J	825	340	233	680	8.0
225/60R17	4	Energize	99	H	6 1/2J	775	300	228	702	8.0
225/65R17	4	Energize	102	H	6 1/2J	850	300	228	724	8.0
235/65R17	4	Energize	104	H	7J	900	300	240	738	8.0


Envoy
CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
205/45R16	4	Envoy	87 XL	W	7J	545	340	206	590	8.0
205/40R17	4	Envoy	88	W	7J	560	340	206	616	8.2
225/45ZR19	4	Envoy	96 XL	W	7 1/2J	710	340	225	685	7.5

PASSENGER CAR RADIAL



CRYSTAL
TIRE



Maxim

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
235/70R16	-	Maxim	106	H	-	-	-	-	-	-
245/70R16	-	Maxim	111 XL	H	-	-	-	-	-	-
265/70R16	-	Maxim	112	T	-	-	-	-	-	-
245/65R17	-	Maxim	111	H	-	-	-	-	-	-
265/65R17	-	Maxim	112	H	-	-	-	-	-	-
265/70R17	-	Maxim	115	H	-	-	-	-	-	-
235/60R18	-	Maxim	107 XL	H	-	-	-	-	-	-
245/60R18	-	Maxim	105	H	-	-	-	-	-	-
265/60R18	-	Maxim	114 XL	H	-	-	-	-	-	-
275/65R18	-	Maxim	116	H	-	-	-	-	-	-



Rapid

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
31x10.50R15LT	6	Rapid	109	Q	8 1/2J	1030	350	268	775	10.0
215/70R16	4	Rapid	99	T	6 1/2J	775	300	221	708	8.5
215/75R15	4	Rapid	100	T	6J	800	300	216	703	8.5
225/70R16	4	Rapid	101	T	6 1/2J	825	300	228	722	8.5
LT235/85R16	10	Rapid	120/116	Q	6 1/2J	1380 / 1260	550	235	806	10.0



Trail

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
215/70R16		Trail	100	H	6 1/2J	800	300	221	708	8

PASSENGER CAR RADIAL



CRYSTAL TIRE



Enduring

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
145/70R12	4	Enduring	69	T	4.50B	325	300	150	509	6.5
155/70R13	4	Enduring	75	T	4.50B	387	300	157	548	7.5
165/65R13	4	Enduring	77	T	5.00B	437	300	170	562	7.5
165/70R13	4	Enduring	79	T	5.00B	437	300	170	562	7.5
165/80R13	4	Enduring	83	T	4.50B	487	300	165	594	7.5
175/60R13	4	Enduring	77	T	5J	412	300	177	540	7.5
175/70R13	4	Enduring	82	T	5.00B	475	300	177	576	7.5
175/70R14	4	Enduring	84	T	5J	500	300	177	602	8.0
155/65R13	4	Enduring	73	T	4.50B	365	300	157	532	7.5
165/70R14	4	Enduring	81	T	5J	462	300	170	588	7.5
185/60R14	4	Enduring	82	H	5 1/2J	475	300	189	578	7.5
185/65R14	4	Enduring	86	T	5 1/2J	530	300	189	596	7.5
185/70R13	4	Enduring	86	T	5.50B	530	300	189	590	8.0
185/70R14	4	Enduring	88	T	5 1/2J	560	300	189	616	8.0
195/70R14	4	Enduring	91	T	6J	615	300	201	630	8.0
205/60R14	4	Enduring	88	T	6J	560	300	209	602	7.5
205/70R14	4	Enduring	98XL	T	6J	750	340	209	644	8.0
205/70R15	4	Enduring	96	T	6J	710	300	209	669	8.0





CRYSTAL
TIRE



Drift

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
215/45R17	4	Drift	91 XL	W	7J	615	340	213	626	8.0
205/50R17	4	Drift	93 XL	W	6 1/2J	650	340	214	638	8.0
215/45R17	4	Drift	91 XL	W	7J	615	340	213	626	8.0
215/50R17	4	Drift	95 XL	W	7J	690	340	226	648	8.0
215/55R17	4	Drift	94	W	7J	670	300	226	688	8.0
225/45R17	4	Drift	94 XL	W	7 1/2J	670	340	225	634	8.0
225/40R18	4	Drift	92 XL	W	8J	630	340	230	637	8.0
225/45R18	4	Drift	95 XL	W	7 1/2J	690	340	225	659	8.0
245/45R18	4	Drift	100 XL	W	8J	800	340	243	677	8.0
235/55R18	4	Drift	104 XL	V	7 1/2J	900	340	245	715	8.0
235/55R19	4	Drift	105 XL	V	7 1/2J	925	340	245	741	8.0



Delta

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
245/45ZR20		Delta	103	W	8J	875	340	243	728	8
285/50ZR20		Delta	116	W	9J	1250	340	297	794	8
265/50ZR20		Delta	111	W	8 1/2J	1090	340	277	774	8



Alto

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
285/45ZR22	-	Alto	114	Y	9 1/2J	1180	340	285	815	8

PASSENGER CAR RADIAL



CRYSTAL
TIRE

Cruise

CRYSTAL PCR



Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
175/65R14	4	Cruise	82	H	5J	475	300	177	584	8.0
185/65R14	4	Cruise	86	H	5 1/2J	530	300	189	596	7.5
185/60R15	4	Cruise	84	H	5 1/2J	500	300	189	603	8.0
185/65R15	4	Cruise	88	H	5 1/2J	560	300	189	621	8.0
*195/50R15	4	Cruise	82	V	6J	475	300	201	577	8.0
195/55R15	4	Cruise	85	V	6J	515	300	201	595	8.0
195/60R15	4	Cruise	88	V	6J	560	300	201	615	8.0
195/65R15	4	Cruise	91	V	6J	615	300	201	635	7.5
205/55R16	4	Cruise	91	V	6 1/2J	615	300	214	632	8.0
205/60R15	4	Cruise	91	H	6J	615	300	209	627	8.0
*205/60R16	4	Cruise	92	V	6J	630	300	209	652	8.0
205/65R15	4	Cruise	94	V	6J	670	300	209	647	8.0
215/60R16	4	Cruise	95	V	6 1/2J	690	300	221	664	8.0
*215/65R15	4	Cruise	96	V	6 1/2J	710	300	221	661	8.0
215/70R15	4	Cruise	98	T	6 1/2J	750	300	221	683	8.2
225/60R16	4	Cruise	98	V	6 1/2J	750	300	228	676	8.0



PASSENGER CAR RADIAL



CRYSTAL
TIRE



DS01

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
225/60R17		DS01	99	H	6 1/2J	775	300	228	702	8.4
235/60R18		DS01	107	H	7J	975	340	240	739	8.4
245/45R19		DS01	98	H	8J	750	300	243	703	8.4
215/75R15		DS01	100	T	6J	800	300	216	703	8.7
225/70R16		DS01	103	T	6 1/2J	875	300	228	722	8.7
265/70R16		DS01	112	H	8J	1120	300	272	778	8.7
265/70R17		DS01	115	H	8J	1215	300	272	804	8.7



Pantherex

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
165/65R13 77T		Pantherex	77	T	5.00B	412	300	170	544	7.6
175/70R13 82T /		Pantherex	82	T	5.00B	475	300	177	576	7.8



Avenue

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
235/75R15	-	Avenue	-	-	-	-	-	-	-	-

PASSENGER CAR RADIAL



CRYSTAL
TIRE



Premier

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
205/75R14	/	Premier	95	S	5 1/2J	690	300	203	664	7.8
215/75R15	/	Premier	100	S	6J	800	300	216	703	7.8
215/75R15	/	Premier WSW00		S	6J	800	300	216	703	7.8



Elevate

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
275/40ZR20		Elevate	106	W	9 1/2J	950	340	278	728	8
285/60R18		Elevate	116	H	8 1/2J	1250	300	292	799	8
265/60R18		Elevate	110	H	8J	1060	300	272	775	8
235/55R19		Elevate	105	V	7 1/2J	925	340	245	741	8
265/65R17		Elevate	112	T	8J	1120	300	272	776	8
265/65R18		Elevate	114	T	8J	1180	300	272	801	8



Orbit

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
215/60R16		Orbit	99	H	6 1/2J	775	340	221	664	7
205/55R16		Orbit	91	V	6 1/2J	615	300	214	632	7
195/65R15		Orbit	91	H	6J	615	300	201	635	7
175/70R13		Orbit	82	T	5B	475	300	177	576	7
185/70R13		Orbit	86	T	5 1/2B	530	300	189	590	6.5
205/60R16		Orbit	92	H	6J	630	300	209	652	7.5
175/70R14		Orbit	84	T	5J	500	300	177	602	7
185/65R15		Orbit	88	H	5 1/2J	560	300	189	621	7

PASSENGER CAR RADIAL



CRYSTAL
TIRE



Radiant

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
215/75R17.5-18	-	Radiant	-	-	-	-	-	-	-	-



Rough

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
205/65R15		Rough	94	H	6J	670	300	209	647	7
185/70R14		Rough	88	T	5 1/2J	560	300	189	616	7
195/70R14		Rough	91	T	6J	615	300	201	630	7
185/65R14		Rough	86	T	5 1/2J	530	300	189	596	7
195/60R15		Rough	88	H	6J	560	300	201	615	7.7
225/45ZR17		Rough	94	W	7 1/2J	670	340	225	634	7
175/65R14		Rough	82	T	5J	475	300	177	584	7.7



Span

CRYSTAL PCR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
225/60R18		Span	100	H	6 1/2J	800	300	228	727	8
235/65R17		Span	104	H	7J	900	300	240	738	8
225/65R17		Span	102	H	6 1/2J	850	300	228	724	8



**CRYSTAL
TIRE**



LIGHT TRUCK RADIAL

LIGHT TRUCK RADIAL



CRYSTAL
TIRE



Capacity

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
215R15C	8	Capacity	112/110	S	6J	1120 / 1060	450	218	725	8.5



Dynamic

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
5.00R12LT	10	Dynamic	88/86	Q	3.50B	530/1170	500/73	143	568	7.3
5.50R13LT	12	Plus	97/95	p	4.50B	730/690	625	-	-	8.0



LIGHT TRUCK RADIAL



CRYSTAL
TIRE



Navigation

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
195R14CWSW 8	8	Navigation	106/104	R	5 1/2J	950/900	450	198	666	9.0
195R14CBSW 8	8	Navigation	106/104	R	5 1/2J	950/900	450	198	666	9.0
195R15C	8	Navigation	106/104R	R	5 1/2J	950/900	450	196	691.4	9.2



Robust

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
205R16C	8	Robust	110/108	R	6J	110/108	450	310	732	9.0
255/70R15C	6	Robust	112/110	S	6.50J	1120/1060	375	258	734	9.0



Turbo

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
9.5R17.5-16		Turbo	129/127	L	6.75	1850/1750	750	240	842	13.3
8.5R17.5-12		Turbo	121/120	L	6	1450/1400	625	215	802	13.3
235/75R17.5-18		Turbo	143/141	J	6.75	2725/2575	875	233	797	13

LIGHT TRUCK RADIAL



CRYSTAL
TIRE



Powermax

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
195R14C	8	Powermax 106/104		Q	5 1/2J	950/900	450	198	666	9.0
195R15C	8	Powermax 106/104		Q	5 1/2J	950/900	450	196	693	9.0
185R14C B	8	Powermax 102/100		R	5 1/2J	850/800	450	188	650	9.0
205R14C	8	Powermax 109/107		R	6J	1030/975	450	208	686	9.0
195/70R15C	8	Powermax 104/102		R	6J	900/850	450	201	655	9.0
225/70R15C	8	Powermax 112/110		R	6 1/2J	1120/1060	450	228	697	9.0



Vega

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
205/75R17.5-16		VEGA	125/123	M	6	1650/1500	830	204	733	13



Voltage

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
255/70R16		Voltage	111	T	7 1/2J		300	260	764	8.5

LIGHT TRUCK RADIAL



CRYSTAL
TIRE



Delight

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
185R14C		Delight	102/100	R	5 1/2J		450	188	650	7.8



Active

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
205/70R15C	-	Active	106/104	S	6.00J	950	450	209	669	8.5
205/70R15C Saudi		Active	106/104	S	6.00J	950	450	209	669	8.5



CS-118

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
650R16LT-10PR TTF		CS118	107/102	L	5.50F	975	560	185	750	10
650R16LT-10PR TFL		CS118	107/102	L	5.50F	975	560	185	750	10
700R16-LT-12PR TTF		CS118	115/110	M	5.50F	1215	670	200	775	10
700R16LT-12PR TFL		CS118	115/110	M	5.50F	1215	670	200	775	10
750R16LT-14PR TTF		CS118	122/118	L	6.00G	1500	770	215	805	10.5
750R16LT-14PR TFL		CS118	122/118	L	6.00G	1500	770	215	805	10.5

LIGHT TRUCK RADIAL



CRYSTAL
TIRE



Cosmo

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
205/70R15C	-	Cosmo	106/104	S	6.00J	950	450	209	669	8.5



Force

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
155/70R12 TL	-	Force	73	Q	4.50B	365	250	157	523	5



Force 2X

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
145/70R12 TL	-	Force 2X	69	Q	4.50B	325	250	150	509	4.5

LIGHT TRUCK RADIAL



CRYSTAL
TIRE



Performer

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
500R12	10	Performer	88/86	P	3.50B	560	550	143	568	8.7



Rough SR

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
750R16LT	8	Rough SR	112/107	M	6.00G	1120	460	215	805	10



Roger

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
550R12	12	Roger	92/90	P	3.50B	630	560	163	597	10

LIGHT TRUCK RADIAL



CRYSTAL
TIRE



Trekking

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
195R14LT	8	Trekking	105/103	Q	51/2J	925	450	196	668	8.7
195R15LT	8	Trekking	106/104	Q	51/2J	950	450	196	693	8.7



Vision

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
165/70R13LT	6	Vision	88/85	S	5.00B	560/515	450	170	562	8.5



Zeal

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
500R12	10	Zeal	88/86	P	3.50B	560	550	143	568	10
550R13LT	12	Zeal	97/95	P	4.00B	560	460	160	620	9.7

LIGHT TRUCK RADIAL



CRYSTAL
TIRE



Zeal Plus

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
500R12	10	Zeal Plus	88/86	P	3.50B	560	550	143	568	8.7



DS-706

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
14.00R20-20 T120		DS706	164/161	K	10	5000/4625	790	375	1253	20.3
14.00R20-20 T20		DS706	164/161	F	10	5000/4625	790	375	1253	20.3



LIGHT TRUCK RADIAL



CRYSTAL
TIRE



Raptor

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
LT235/85R16 W-		Raptor	120/116Q	Q	6 1/2J	1380/1260	550	235	806	13.0
31X10.50R15LT W		Raptor	109Q	Q	8 1/2J	1030	350	268	775	13.5



Strength

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
155R12LT	8	Strength	88/86	S	4.50B	560/530	450	157	553	7.5
155R12C	8	Strength	88/86	S	4.50B	560/530	450	157	553	7.5



LIGHT TRUCK RADIAL



CRYSTAL
TIRE



DS-801

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
5.50R12LT	12	DS801	92/90	P	4.00B	630/600	500	160	595	8.5



DS-809

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
5.00R12LT	10	DS809	88/86	P	3.50B	560/530	550	143	568	9.5



CS-706

CRYSTAL LTR

Size	PR	PATTERN	LOAD INDEX	SPEED RATING	STANDARD RIM	Max. Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter, Inflated(mm)	Pattern Depth (mm)
205/70R15C	8	CS706	106/104	S	6J	950	450	209	669	8.5





CRYSTAL
TIRE



OFF THE ROAD RADIAL

OFF THE ROAD RADIAL



CRYSTAL
TIRE



L-3 NEW

CRYSTAL OTR

TIRE SIZE	STANDARD RIM	PATTERN	DEEP (mm)	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)	(Km/h)	TYPE	PLY RATING
16/70-20	13	L-3 NEW	25	410	1075	3350	450	50/10	TT	18.0
20.5/70-16	10	L-3 NEW	16	353	915	1600	390	50/10	TT	14.0
23.5-25	19.5	L-3 NEW	31	595	1615	8000	350	50/10	TT/TL	24.0
23.5-25	19.5	L-3 NEW	31	595	1615	7300	300	50/10	TT/TL	20.0
23.5-25	19.5	L-3 NEW	31	595	1615	6150	225	50/10	TT/TL	16.0
20.5-25	17	L-3 NEW	29	520	1490	6700	400	50/10	TT/TL	24.0
20.5-25	17	L-3 NEW	29	520	1490	6000	325	50/10	TT/TL	20.0
20.5-25	17	L-3 NEW	29	520	1490	5450	275	50/10	TT/TL	16.0
17.5-25	14	L-3 NEW	25	445	1350	4250	400	50/10	TT/TL	20.0
17.5-25	14	L-3 NEW	25	445	1350	4250	300	50/10	TT/TL	16.0



G2

CRYSTAL OTR

TIRE SIZE	STANDARD RIM	PATTERN	DEEP (mm)	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)	(Km/h)	TYPE	PLY RATING
14.00-24	8.00TG	G2	23.5	360	1350	2500	175	50/10	TT/TL	8.0
13.00-24	8.00TG	G2	23.5	330	1280	2060	200	50/10	TT/TL	8.0
17.5-25	14.00/1.5	G2	24	445	1350	7300	480	50/10	TL	16.0



OFF THE ROAD RADIAL



CRYSTAL
TIRE



E-3/L-3

CRYSTAL OTR

TIRE SIZE	STANDARD	PATTERN	DEEP (mm)	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)	(Km/h)	TYPE	PLY RATING
29.5-25	25.00	E-3/L-3	36	710	1840	11500	325	50/10	TT/TL	28.0
26.5-25	22.00	E-3/L-3	35	645	1743	10000	350	50/10	TT/TL	32.0
26.5-25	22.00	E-3/L-3	35	645	1743	9250	300	50/10	TT/TL	28.0
26.5-25	22.00	E-3/L-3	35	645	1743	8250	250	50/10	TT/TL	24.0
23.5-25	19.50	E-3/L-3	31	595	1615	8000	350	50/10	TT/TL	24.0
23.5-25	19.50	E-3/L-3	31	595	1615	7300	300	50/10	TT/TL	20.0
23.5-25	19.50	E-3/L-3	31	595	1615	6150	225	50/10	TT/TL	16.0
20.5-25	17.00	E-3/L-3	29	520	1490	6700	400	50/10	TT/TL	24.0
20.5-25	17.00	E-3/L-3	29	520	1490	6000	325	50/10	TT/TL	20.0
20.5-25	17.00	E-3/L-3	29	520	1490	5450	275	50/10	TT/TL	16.0
18.00-25	13.00	E-3/L-3	28	495	1615	16000	850	50/10	TT/TL	36.0
18.00-24	13.00	E-3/L-3	28	495	1615	15000	750	50/10	TT/TL	32.0
17.5-25	14.00	E-3/L-3	25	445	1350	4250	400	50/10	TT/TL	20.0
17.5-25	14.00	E-3/L-3	25	445	1350	4250	300	50/10	TT/TL	16.0
16/70-24	13.00	E-3/L-3	25	410	1175	3375	350	50/10	TT/TL	14.0
16/70-20	13.00	E-3/L-3	25	410	1075	3350	450	50/10	TT/TL	18.0
16.00-25	11.25	E-3/L-3	26	430	1490	12500	875	50/10	TT/TL	32.0
16.00-24	11.25	E-3/L-3	26	430	1490	6000	475	50/10	TT/TL	24.0
16.00-24	11.25	E-3/L-3	26	430	1490	5450	400	50/10	TT/TL	20.0
16.00-24	11.25	E-3/L-3	26	430	1490	4875	325	50/10	TT/TL	16.0
15.5-25	12.00	E-3/L-3	24	395	1275	3250	250	50/10	TT/TL	12.0
14/90-16	8.5H	E-3/L-3	16	215	896	1245	290	50/10	TT/TL	16.0
14.00-24	10.00	E-3/L-3	24	375	1370	5150	575	50/10	TT/TL	24.0
14.00-24	10.00	E-3/L-3	24	375	1370	4625	475	50/10	TT/TL	20.0
14.00-24	10.00	E-3/L-3	24	375	1370	4000	375	50/10	TT/TL	16.0
1200-16	8.50	E-3/L-3	20	244	884	1245	390	50/10	TT/TL	12.0

OFF THE ROAD RADIAL



CRYSTAL
TIRE



SH-278

CRYSTAL OTR

TIRE SIZE	STANDARD RIM	PATTERN	DEEP (mm)	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)	PLY RATING
8.25-15	6.50	SH-278	17	235	840	3700	800	14.0
8.25-12	7.00	SH-278	15	235	696	2850	790	12.0
28*9-15	7.0	SH-278	17	230	700	3035	700	12.0
750-15	6.00	SH-278	15	215	808	2650	790	12.0
7.00-12	5.00S	SH-278	15	190	676	2720	860	12.0
7.00-9	5.00S	SH-278	13	190	590	2145	850	10.0
6.50-10	5.00F	SH-278	13.5	175	510	2170	510	10.0
6.00-9	4.00E	SH-278	11.5	160	540	1680	860	10.0
5.00-8	3.50D	SH-278	10	137	470	1290	1000	10.0



R4

CRYSTAL OTR

TIRE SIZE	STANDARD RIM	PATTERN	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)	PLY RATING
21L-24	DW18	R4	533	1400	2090	150	10.0
19.5L-24	DW16	R4	495	1340	1925	170	10.0
17.5L-24	W15L	R4	445	1265	1500	150	8.0
16.9-28	W15L	R4	430	1435	2380	200	10.0
16.9-24	W15L	R4	430	1335	2230	200	10.0

OFF THE ROAD RADIAL



CRYSTAL
TIRE



R4

CRYSTAL OTR

TIRE SIZE	STANDARD RIM	PLY RATING	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)	TYPE
12.5/80-18	9	12	317	940	2625	370	TL
10.5/80-18	9.00	10	279	875	1935	370	TL



L2

CRYSTAL OTR

TIRE SIZE	STANDARD RIM	PLY RATING	DEEP(mm)	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)	TYPE
15-19.5	11.75	14	22	390	1020	4565	480	TL
14-17.5	10.5	14	22	350	920	3875	550	TL
12-16.5	9.75	10	21	307	840	2540	450	TL
10-16.5	8.25	8	21	264	770	1880	410	TL



SH-308

CRYSTAL OTR

TIRE SIZE	STANDARD RIM	PLY RATING	DEEP (mm)	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)
14.00-20	10.00	18	9	330	1215	3270	425

OFF THE ROAD RADIAL



CRYSTAL
TIRE



R1

CRYSTAL OTR

TIRE SIZE	STANDARD	PLY RATING	DEEP (mm)	Pairs of R1 Pattern	(mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)
23.1-26	DW20	10	36	19	554	1542	3245	140
20.8-38	W18L	12	38	21	528	1835	4000	200
18.4-42	W16	10	35	22	467	1857	3330	180
18.4-38	w16l	10	37	21	467	1755	3165	180
18.4-34	W16L	10	36	20	467	1655	2990	180
18.4-30	W16L	10	36	19	467	1550	2815	180
18.4-26	DW16	10	35	19	467	1450	2645	180
16.9-38	W15L	10	36	20	464	1685	2760	200
16.9-34	W15L	10	36	20	429	1585	2605	200
16.9-30	W15L	10	36	19	447	1499	2455	200
16.9-28	W15L	10	35	18	430	1435	2380	200
16.9-24	W15L	10	33	18	430	1335	2230	200
15.5-38	W14L	10	34	22	391	1549	1760	207
15-24	W14	10	32	16	400	1310	2800	280
14.9-30	W13	6	32	21	378	1415	1665	140
14.9-28	W13	8	34	19	378	1365	1800	180
14.9-26	W13	6	32	20	378	1315	1560	140
14.9-24	W15L	8	22	17	378	1265	1530	179
13.6-38	W12	10	34	22	328	1548	2215	250
13.6-28	W12	8	31	19	345	1310	1645	200
13.6-24	W12	10	30	18	345	1210	1790	250
12.4-28	W11	8	29	20	315	1260	1510	230
12.4-24	W11	8	29	18	315	1160	1415	230
12-38	11	8	35	23	298	1563	1570	140
11.2-38	10.00	10	32	22	284	1448	1180	221
11.2-28	W10	10	28	18	285	1205	1490	310

OFF THE ROAD RADIAL



CRYSTAL
TIRE



R1

CRYSTAL OTR

TIRE SIZE	STANDARD RIM	PLY RATING	DEEP (mm)	Pairs of R1 Pattern	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)	
11.2-24	W10	8	26	18	285	1105	1225	240
9.50-24	W8	8	25	21	240	1050	1110	280
9.50-20	W8	8	25	19	240	1050	955	280
8.30-24	W7	6	24	23	210	995	810	240
8.30-20	W7	6	24	20	210	895	705	230
7.50-20	5.50F	6	21	24	205	910	760	210
7.50-16	5.50F	6	21	19/22	205	810	450	210
6.00-16	4.50E	6	19	19	165	745	495	250
6.00-12	4.50E	6	20	16	165	640	450	330
5.00-17	4.00E	6	18	/	140	750	780	520
5.00-12	4.00E	4	15	13	145	590	280	200



L-5

CRYSTAL OTR

TIRE SIZE	STANDARD RIM	PLY RATING	DEEP (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)	SECTION WIDTH (Km/h)	TYPE
29.5-25	25.00/3.5	32	90	750	1920	19500	500	TL
29.5-25	25.00/3.5	28	90	750	1920	17500	425	TL
26.5-25	22.00/3.0	28	82	675	1800	15500	475	TL
23.5-25	19.50/2.5	20	72	595	1675	10900	375	TL
20.5-25	17.00/2.0	20	66	520	1550	9500	450	TL
17.5-25	14.00/1.5	16	60	445	1400	7300	475	TL

OFF THE ROAD RADIAL



CRYSTAL
TIRE

SH-358

CRYSTAL OTR



TIRE SIZE	STANDARD RIM	PLY RATING	DEEP (mm)	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)
12.00-20	8.50	12	15	290	1150	4750	580

SH-378

CRYSTAL OTR



TIRE SIZE	STANDARD RIM	PLY RATING	DEEP (mm)	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)
16.00-20	11.25	18	10	430	1390	4800	400
14.00-20	10.00	18	9	330	1215	3270	425

SH-338

CRYSTAL OTR



TIRE SIZE	STANDARD RIM	PLY RATING	DEEP (mm)	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	LOAD (Kg)	PRESSURE (Kpa)
14.00-20	10.00	18	9	330	1215	3270	425


TIRE MANAGEMENT

TIPS

When detecting the abnormal wear of tire, the tire must be replaced immediately, every 10000 km tire transposition. Special attention should be paid to the snow tire.

THE ADVANTAGES OF TIRE TRANSPOSITION

1. Prevent abnormal wear and life extension of the tire.
2. Detect tire damage caused by vehicles in use.
3. Improve the ride comfort and safety.

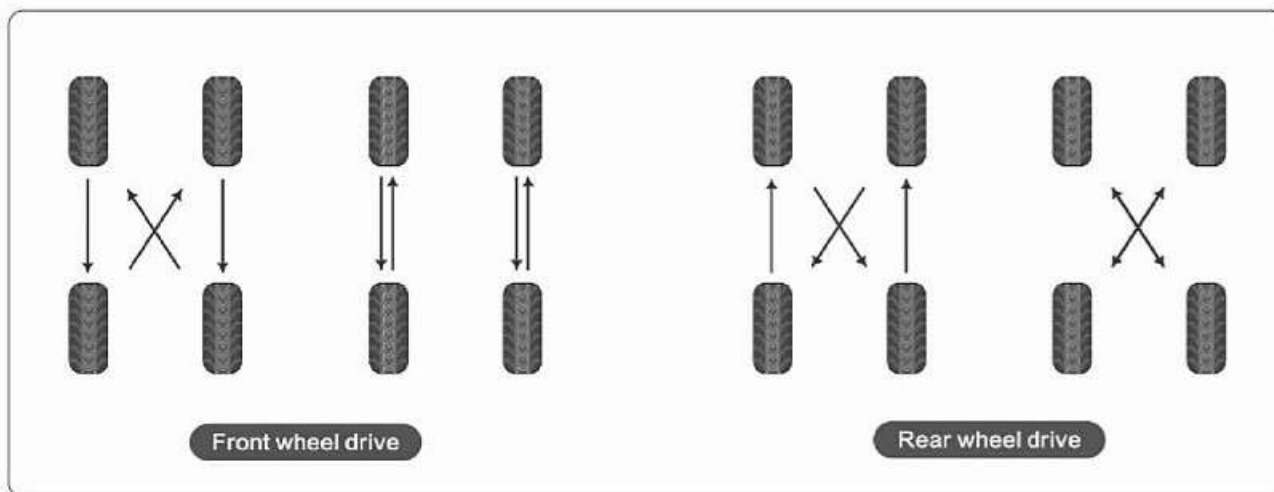


INFLATION PRESSURE

The best inflation pressure is one of the most important aspects of the protection of the tire.


The internal pressure due to tire tread uniform ground contact, and prevent abnormal wear.

Rolling resistance by reducing, and quickly spread the heat generated, so that the internal heat levels are maintained at a stable level.



THE CORRECT PRESSURE

The appropriate pressure, can ensure the tire in the running process of the best ground, prolong the service life.



THE PRESSURE IS TOO LARGE

The tire more easily influenced by external factors in the process of moving (pits, and other debris). Speed the wear of the tire tread.



INSUFFICIENT AIR PRESSURE

Fever injury caused by the lateral excessive bending of the sidewall, and cause the abnormal wear of the tire shoulder. Rolling resistance increased, reduced the service life.



GET SET GO

Introducing

THE IMPROVED VERSION OF AUTOMOTIVE BATTERY



CRYSTAL[®] LONG LIFE BATTERY



SEALED CALCIUM
PREMIUM BATTERY

HANDLE

- Enhances safety by integrated computer design
- Strong power and easy transportation

MAGIC EYE INDICATOR

- Green - Good
- Black - Charging necessary
- White - Replace

COMPUTER INTEGRATED DESIGN

- Reduced noise filtration by compact design & unique injection

PATENT BUSHING

- Exclusive patented for acid leakage
- High resistance to corrosion

ADVANCED CENTER LUG AND CAST-ON-STRAP

- Improves water vibration
- Perfect starting power by powerful welding



GET SET GO

AUTOMOTIVE BATTERY

Follow **FALESGRAND** on:



www.falesgrand.com

CRYSTAL



CRYSTAL
TIRE

Fales Grand

*Transforming
Vision into
Reality...*



HEAD OFFICE (U.A.E):
FALES GRAND GENERAL TRADING L.L.C.
REGIONAL OFFICE (P.R.C.):
QINGDAO FALES GRAND INT'L CO.,LTD.
www.falesgrand.com
sales@falesgrand.com